

# DATA SHEET

## **BGY586; BGY587** CATV amplifier modules

Product specification  
File under Discrete Semiconductors, SC16

February 1995

**Philips Semiconductors**



**PHILIPS**

# CATV amplifier modules

# BGY586; BGY587

## FEATURES


- Excellent linearity
- Extremely low noise
- Silicon nitride passivation
- Rugged construction
- TiPtAu metallized crystals ensure optimal reliability.

## DESCRIPTION

Hybrid amplifier modules for CATV systems operating over a frequency range of 40 to 550 MHz at a voltage supply of 24 V (DC). The BGY586 is intended for use as a pre-amplifier and BGY587 as a final amplifier.

## PINNING - SOT115J

PIN	DESCRIPTION
1	input
2	common
3	common
5	+V <sub>B</sub>
7	common
8	common
9	output

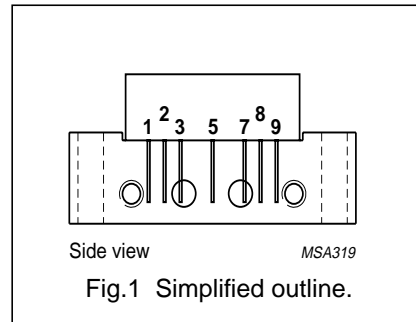

## QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
G <sub>p</sub>	power gain	f = 50 MHz	21.5	–	22.5	dB
		f = 550 MHz	22	–	–	dB
I <sub>tot</sub>	total current consumption (DC)	V <sub>B</sub> = 24 V				
	BGY586		–	180	200	mA
	BGY587	–	220	240	mA	

## LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
V <sub>i</sub>	RF input voltage	–	65	dBmV
T <sub>stg</sub>	storage temperature	–40	+100	°C
T <sub>mb</sub>	operating mounting base temperature	–20	+100	°C

## CATV amplifier modules

## BGY586; BGY587

**CHARACTERISTICS**Bandwidth 40 to 550 MHz;  $V_B = 24$  V;  $T_{mb} = 30$  °C;  $Z_S = Z_L = 75$   $\Omega$ .

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$G_p$	power gain	f = 50 MHz	21.5	–	22.5	dB
		f = 550 MHz	22	–	–	dB
SL	slope cable equivalent	f = 40 to 550 MHz	0.2	–	1.5	dB
FL	flatness of frequency response	f = 40 to 550 MHz	–	–	$\pm 0.2$	dB
$S_{11}$	input return losses	f = 40 to 80 MHz	20	–	–	dB
		f = 80 to 160 MHz	19	–	–	dB
		f = 160 to 550 MHz	18	–	–	dB
$S_{22}$	output return losses	f = 40 to 80 MHz	20	–	–	dB
		f = 80 to 160 MHz	19	–	–	dB
		f = 160 to 550 MHz	18	–	–	dB
$S_{21}$	phase response	f = 50 MHz	+135	–	+225	deg
CTB	composite triple beat BGY586 BGY587	77 channels flat; $V_o = 44$ dBmV; measured at 547.25 MHz	–	–	–53	dB
			–	–	–57	dB
$X_{mod}$	cross modulation BGY586 BGY587	77 channels flat; $V_o = 44$ dBmV; measured at 55.25 MHz	–	–	–55	dB
			–	–	–58	dB
CSO	composite second order distortion BGY586 BGY587	77 channels flat; $V_o = 44$ dBmV; measured at 548.5 MHz	–	–	–50	dB
			–	–	–54	dB
$d_2$	second order distortion BGY586 BGY587	note 1	–	–	–62	dB
			–	–	–66	dB
$V_o$	output voltage BGY586 BGY587	$d_{im} = -60$ dB; note 2	58.5	–	–	dBmV
			61	–	–	dBmV
F	noise figure BGY586 BGY587	f = 550 MHz	–	–	6.5	dB
			–	–	7	dB
$I_{tot}$	total current consumption (DC) BGY586 BGY587	note 3	–	180	200	mA
			–	220	240	mA

**Notes**

- $f_p = 55.25$  MHz;  $V_p = 44$  dBmV;  $f_q = 493.25$  MHz;  $V_q = 44$  dBmV; measured at  $f_p + f_q = 548.5$  MHz.
- Measured according to DIN45004B:  $f_p = 540.25$  MHz;  $V_p = V_o$ ;  $f_q = 547.25$  MHz;  $V_q = V_o - 6$  dB;  $f_r = 549.25$  MHz;  $V_r = V_o - 6$  dB; measured at  $f_p + f_q - f_r = 538.25$  MHz.
- The modules normally operate at  $V_B = 24$  V, but are able to withstand supply transients up to 30 V.